

# OFF ROAD Construction F5

**F32**  
65 kW (88 HP) @ 2300 rpm  
Stage III A / Tier 3


## SPECIFICATIONS

No. of cylinders / valves	4L / 4
Turbocharger	WG (TCA)
Injection System	Mechanical
Displacement	liters 3.2
Bore x Stroke	millimeters 99 x 104
Rated power	kW (HP) @ rpm 65 (88) @ 2300
Max Torque	Nm @ rpm 350 @ -
ATS	i-EGR
Certification	Stage III A / Tier 3

## WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	680 x 534 x 300
Dry Weight	Kg	300

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

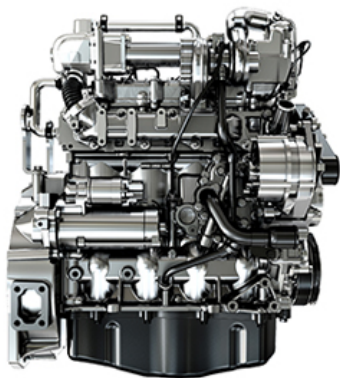

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

## POWER & TORQUE

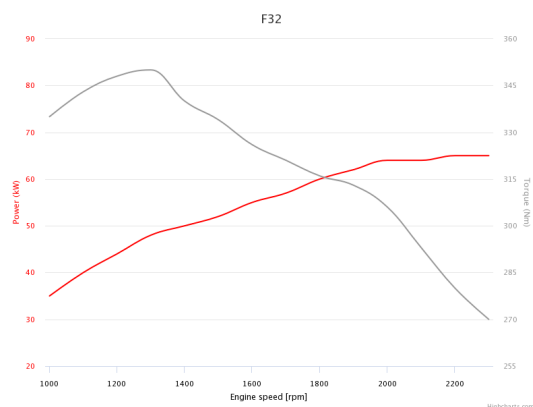

CONSTRUCTION

Do you want to know more?

## LEGEND

### Air Handling

TC (Turbocharged)  
NA (Naturally Aspirated)  
TCA (Turbocharged with aftercooler)

### Turbocharger

WG (Wastegate)  
VGT (Variable Geometry Turbocharger)  
TST (Twin Stage Turbocharge)

### Exhaust System

EGR (Exhaust Gas Recirculation)  
SCR (Selective Catalytic Reduction)  
DPF (Diesel Particulate Filter)  
DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

